


1. MATERIAL Natural: Polyamide 6.6 natural
2. MATERIAL Black: Polyamide 6.6 natural+ ~1-2% carbon black
3. Flammability of raw material : UL 94 - V2
4. Humidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)
5. Installation temperature: -10° C ÷ +85° C (14° F ÷ +185° F)
6. Working temperature: -40° C ÷ +85° C (-40° F ÷ +185° F)
7. Max sustainable temperature for short time: +110°C
8. Good resistance to bases, oils, greases, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.
9. Carbon black addition gives a better UV resistance
10. Comply with UL62275 Type 21, and EN62275

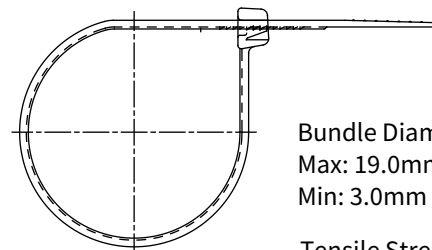

Bundle Diameter:  
Max: 19.0mm  
Min: 3.0mm

Tensile Strength: 8 KGS (18lb)

Mounting Hole for: M2.5 (4#)

Tolerance unspecified  
mm (inch)  
X.XXX  $\pm 0.1$  (0.004)  
X.XX  $\pm 0.25$  (0.010)  
X.X  $\pm 0.5$  (0.02)  
X.  $\pm 1.0$  (0.04)  
ANGULAR  $\pm 2^\circ$

