


Tolerance unspecified  
mm (inch)

X.XXX	±0.1	(0.004)
X.XX	±0.25	(0.010)
X.X	±0.5	(0.02)
X.	±1.0	(0.04)

ANGULAR ± 2°



1. MATERIAL Natural: Polyamide 6.6 natural
2. MATERIAL Black: Polyamide 6.6 natural+ ~1-2% carbon black
3. Flammability of raw material : UL 94 - V2
4. Humidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)
5. Installation temperature: -10° C ÷ +85° C (14° F ÷ +185° F)
6. Working temperature: -40° C ÷ +85° C (-40° F ÷ +185° F)
7. Max sustainable temperature for short time: +110°C
8. Good resistance to bases, oils, greases, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.
9. Carbon black addition gives a better UV resistance
10. Comply with UL62275 Type 21, and EN62275

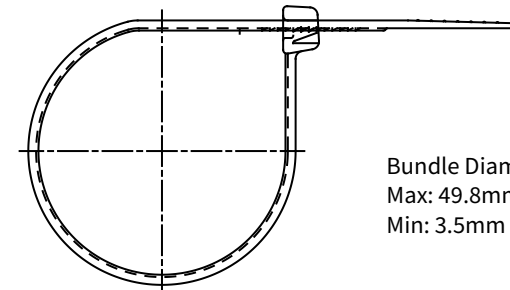

Bundle Diameter:  
Max: 49.8mm **【 1.96"】**  
Min: 3.5mm **【 0.14"】**

Tensile Strength: 23 KGS (50lb)

Mounting Hole for: M5 (10#)