


1. MATERIAL Natural: Polyamide 6.6 natural
2. MATERIAL Black: Polyamide 6.6 natural+ carbon black
3. Flammability of raw material : UL 94 - V2
4. Humidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)
5. Installation temperature: -10° C ÷ +85° C
6. Working temperature: -40° C ÷ +85° C
7. Max sustainable temperature for short time: +110°C
8. Good resistance to bases, oils, greases, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.
9. Carbon black addition gives a better UV resistance
10. Comply with UL62275, and EN62275

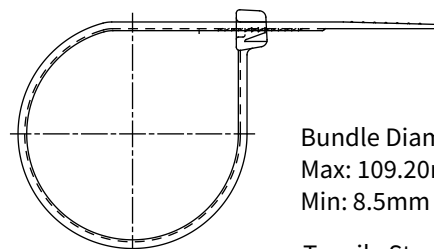

Bundle Diameter:
Max: 109.20mm
Min: 8.5mm

Tensile Strength: 54kgs (120lbs)

Tolerance unspecified
mm (inch)

X.XXX	±0,1	(0,004)
X.XX	±0,25	(0,010)
X.X	±0,5	(0,02)
X.	±1,0	(0,04)

ANGULAR ± 2°

