


1. MATERIAL Black: Polyamide 6.6 natural+ ~1% carbon black
2. Flammability of raw material : UL 94 - V2
3. Humidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)
4. Installation temperature: -20° C ÷ +85° C
5. Working temperature: -40° C ÷ +85° C
6. Max sustainable temperature for short time: +110° C
7. Good resistance to bases, oils, greases, oil derivatives, chloride solvents. Limited resistance to acids. Not resistant to phenols.
8. Carbon black addition gives a better UV resistance
9. Comply with UL62275, and EN62275

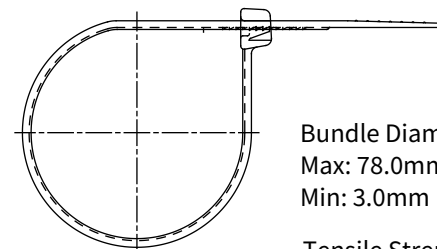

Bundle Diameter:  
Max: 78.0mm  
Min: 3.0mm

Tensile Strength: 18kgs(40lbs)

Tolerance unspecified  
mm (inch)  
X.XXX  $\pm 0.1$  (<0.004)  
X.XX  $\pm 0.25$  (<0.010)  
X.X  $\pm 0.5$  (<0.02)  
X.  $\pm 1.0$  (<0.04)  
ANGULAR  $\pm 2^\circ$

