


Tolerance unspecified  
 mm (Inch)  
 X.XXX  $\pm 0.1$  (0.004)  
 X.XX  $\pm 0.25$  (0.010)  
 X.X  $\pm 0.5$  (0.02)  
 X.  $\pm 1.0$  (0.04)  
 ANGULAR  $\pm 2^\circ$



1. MATERIAL Natural: Polyamide 6.6 natural
2. MATERIAL Black: Polyamide 6.6 natural+ ~1% carbon black
3. Flammability of raw material : UL 94 - V2
4. Humidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)
5. Installation temperature: -10° C ÷ +85° C (14° F ÷ +185° F)
6. Working temperature: -40° C ÷ +85° C (-40° F ÷ +185° F)
7. Max sustainable temperature for short time: +110°C
8. Good resistance to bases, oils, greases, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.
9. Carbon black addition gives a better UV resistance
10. Comply with UL62275 Type 21, and EN62275

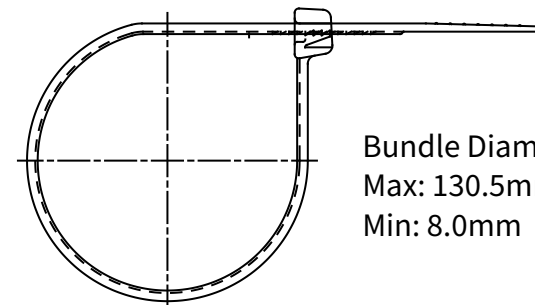

Bundle Diameter:  
 Max: 130.5mm  
 Min: 8.0mm

Tensile Strength: 80 KGS (175lb)