

Tolerance unspecified
mm (inch)
X.XXX ±0.1 (0.004)
X.XX ±0.25 (0.010)
X.X ±0.5 (0.02)
X. ±1.0 (0.04)
ANGULAR ± 2°



Figure 1


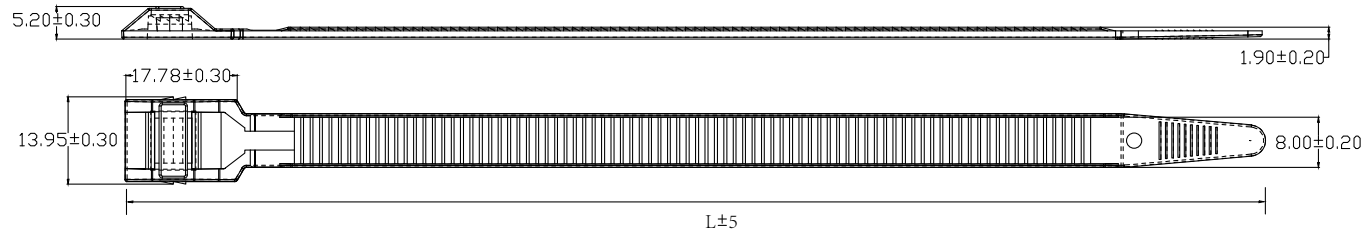


Figure 2

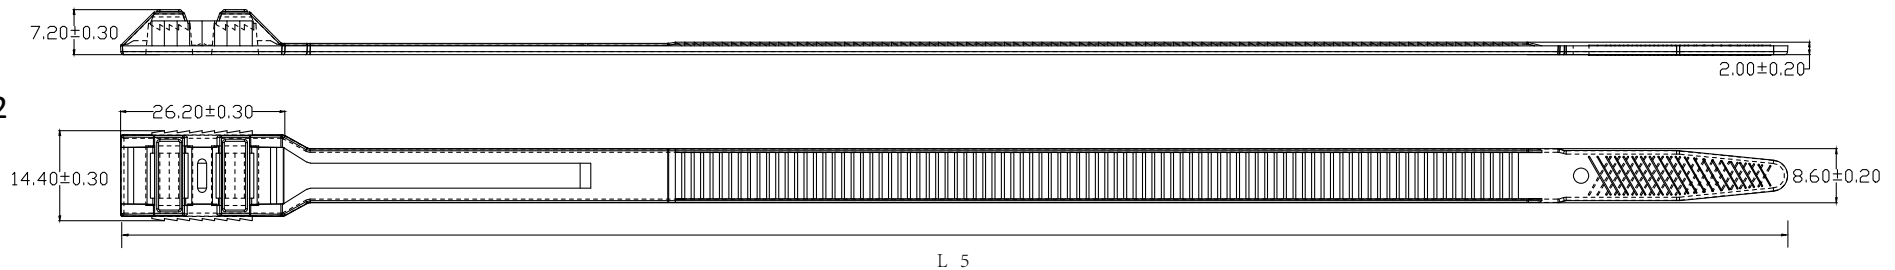

1. MATERIAL Natural: Polyamide 6.6 natural
2. MATERIAL Black: Polyamide 6.6 natural+ carbon black
3. Flammability of raw material : UL 94 - V2
4. Humidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)
5. Installation temperature: -10° C ÷ +85° C
6. Working temperature: -40° C ÷ +85° C
7. Max sustainable temperature for short time: +110°C
8. Good resistance to bases, oils, greases, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.
9. Carbon black addition gives a better UV resistance
10. Comply with UL62275, and EN62275

Item #	L (mm)	Min Bundle Diameter (mm)	Max Bundle Diameter (mm)	Tensile Strength	Figure
229180	180	20	40	40lb	1
229300	300	20	80	120lb	2
229360	360	20	93	120lb	2
229510	510	20	140	120lb	2